

# PRO-AIR UNITS - 3 MODELS

## P-03, P-06, P-12 & P-20

**BAL-TROL® IS THE COST EFFECTIVE SOLUTION FOR WORKPLACE LIFTING INJURIES.**

### TWO MOUNTING STYLES: HORIZONTAL AND VERTICAL

- For All Repetitive Lifting Applications.
- Made to Order Travels from 1 Foot to 30 Feet (304 mm to 9144 mm) or More.
- Stock Sizes Available.
- Smallest, Most Compact Bal-Trol®.
- Same Lifting Capacity as M & F Models.
- Simple to Operate.
- It Contains No Expensive Electronic Components or Computer Parts to Fail, Overheat, Have Moisture Damage or Require Reprogramming.

LOAD CAPACITY				
RATIO	P-03	P-06	P-12	P-20
	6 BAR	6 BAR	6 BAR	6 BAR
8:1	20 kg	40 kg	75 kg	N/A
6:1	30 kg	50 kg	100 kg	N/A
4:1	40 kg	75 kg	150 kg	250 kg

Examples:

**Model - PH12/6-7-H**  
Pro-Air, Horizontal Mtg., 100 kg cap., 7ft. = 2133 mm travel, Speed Handle Control.

**Model - PH06/8-4-SL**  
Pro-Air, Horizontal Mtg., 40 kg. cap., 4ft. = 1219 mm travel, Slim-Line Sensi-Touch® Control.

**Model - PV03/6-6-B**  
Pro-Air, Vertical Mtg., 30 kg cap., 6ft. = 1828 mm travel, Balance Control.


CHECK UNIT'S OVERALL LENGTH, CHECK YOUR HORIZONTAL & VERTICAL DIMENSIONS SEE PAGE 8.

#### ORDER PRO-AIR CAPACITY VERTICAL

P
V
0
3
/
6
—
6
—
B

MOUNTING V/H      MODEL      RATIO      TRAVEL (6 FT.)      BALANCE CONTROL

**PV03/6-6-B** Pro-Air Capacity, Vertical mounting, 30 kg Cap. @ 6 bar  
6 ft. = 1828 mm travel with Balance Control.

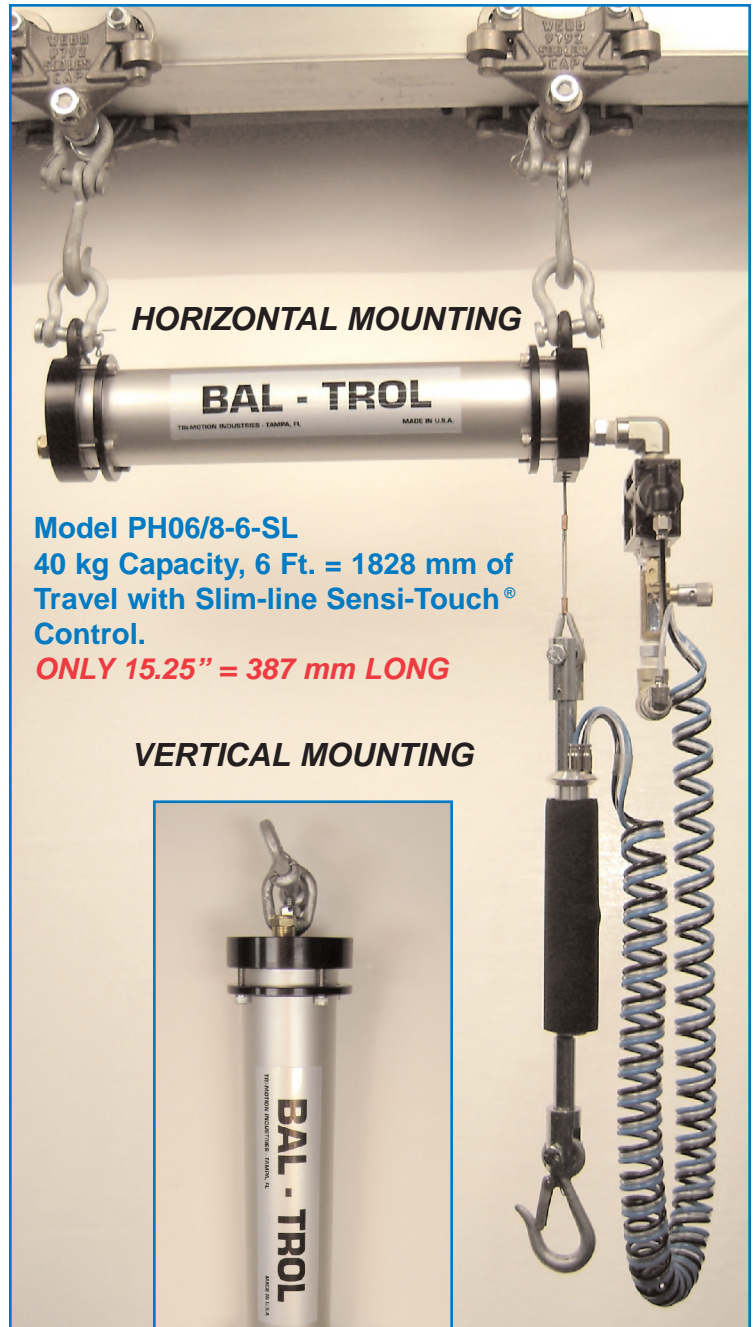

**Model PH06/8-6-SL**  
40 kg Capacity, 6 Ft. = 1828 mm of Travel with Slim-line Sensi-Touch® Control.  
**ONLY 15.25" = 387 mm LONG**

Pro-Air units are covered by U.S. Patent No. 7,798,472-B2. Also shown, the Slim-Line Sensi-Touch® is covered by U.S. Patent No. 6,595,104-B2.