


M-MODULAR RATIO UNITS - 4 MODELS

M-03, M-06, M-12 & M-40

TWO MOUNTING STYLES: HORIZONTAL AND VERTICAL

- Modular Units - *SPACE SAVERS*
- Supply Ergonomic Solution For Work Force Efficiency And Safety For The Workplace.
- Each Model Offers A Wide Range Of Lifting Capabilities.
- Easy To Install And Maintain - Field Repairable.
- Made To Order Travels From 1 ft. To 15 ft. (304 mm to 4500 mm) Or More.
- Ideal for all Types of Repetitive Pick and Place Applications.
- Greatly Reduces Operator Fatigue and Physical Stress Related Injuries.

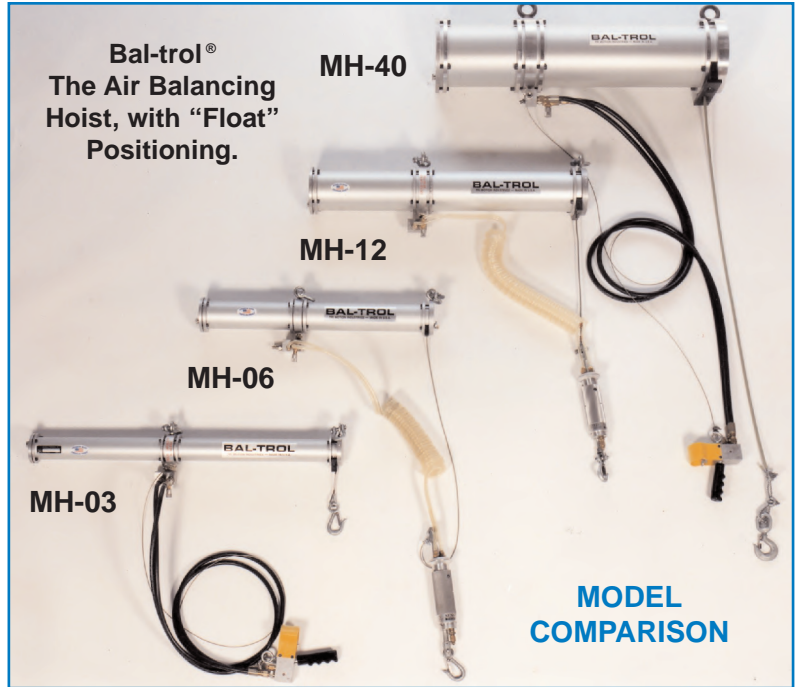

LOAD CAPACITY				
RATIO	M-03	M-06	M-12	M-40
	6 BAR	6 BAR	6 BAR	6 BAR
8:1	20 kg	40 kg	75 kg	160 kg
6:1	30 kg	50 kg	100 kg	240 kg
4:1	40 kg	75 kg	150 kg	320 kg

ORDER MODULAR CAPACITY VERTICAL

M
V
0
3 /
 6 —
 6 —
 B
 MTG V/H MODEL RATIO TRAVEL (6 FT.) BALANCE CONTROL

MV03/6-6-B Modular capacity, Vertical mounting, 30 kg Cap. @ 6 BAR
6 ft. = 1828 mm travel with Balance Control.

Examples:

Model - MH12/6-7-H

Modular Ratio, Horizontal Mtg., 100 kg cap., 7 ft. = 2133 mm travel, Speed Handle Control.

Model - MV06/8-4-SL

Modular Ratio, Vertical Mtg., 40 kg cap., 4 ft. = 1219 mm travel, Slim-Line Sensi-Touch® Control.

Model - MV03/6-6-B

Modular Ratio, Vertical Mtg., 30 kg cap., 6 ft. = 1828 mm travel, Balance Control.

WE RECOMMEND OUR SAFETY CHAIN & DROP STOP® LOAD ARRESTORS (OSHA APPROVED) FOR SAFETY OF PERSONNEL AND PRODUCT.