


# INSTALLATION ADJUSTMENTS AND OPERATION: "DUAL ACTING" SLIM-LINE SENSI-TOUCH 905-09010 & 905-09011

REVISION DATE: 2016-08-05  
W.J.P.

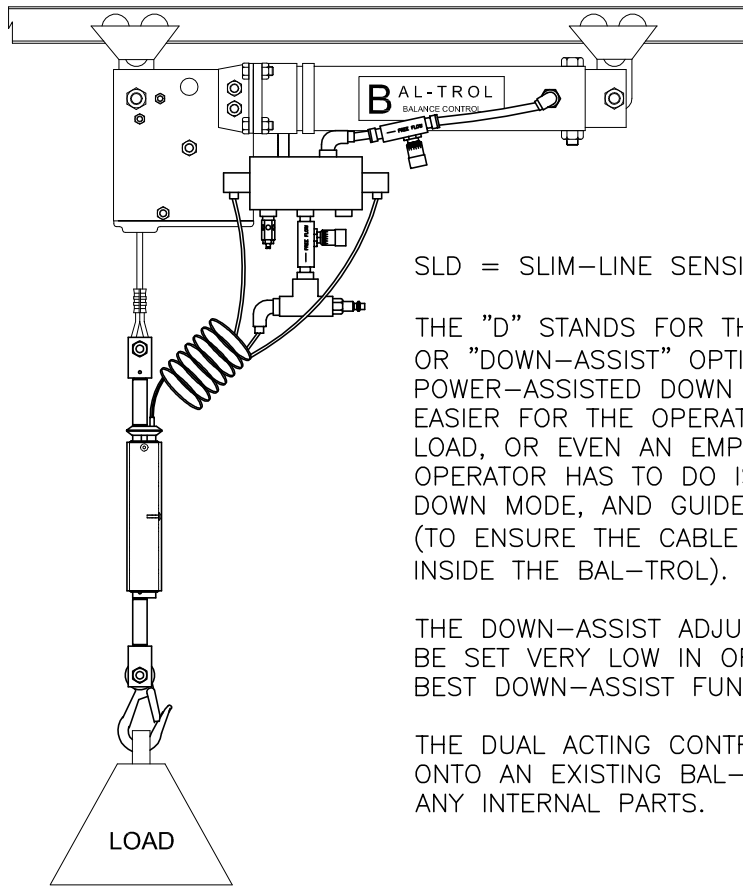

SLD = SLIM-LINE SENSI-TOUCH, DUAL ACTING

THE "D" STANDS FOR THE "DUAL-ACTING" OPTION, OR "DOWN-ASSIST" OPTION. IT PROVIDES A POWER-ASSISTED DOWN MODE, WHICH MAKES IT EASIER FOR THE OPERATOR TO LOWER A LIGHT LOAD, OR EVEN AN EMPTY HOOK. ALL THE OPERATOR HAS TO DO IS PUT THE CONTROL INTO DOWN MODE, AND GUIDE THE EMPTY HOOK DOWN, (TO ENSURE THE CABLE DOES NOT BECOME JAMMED INSIDE THE BAL-TROL).

THE DOWN-ASSIST ADJUSTMENT ONLY NEEDS TO BE SET VERY LOW IN ORDER TO PROVIDE THE BEST DOWN-ASSIST FUNCTIONALITY.

THE DUAL ACTING CONTROL CAN BE RETROFIT ONTO AN EXISTING BAL-TROL WITHOUT CHANGING ANY INTERNAL PARTS.

## UP & DOWN SPEED ADJUSTMENTS

**Warning: Very high speeds are possible**

**Begin with low speeds, then gradually increase**

1. Start with the **LIGHTEST** LOAD, (or empty hook), and set the **UP SPEED**
2. Switch to the **HEAVIEST** LOAD, and set the **DOWN SPEED**

